




# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.




### 2.54mm Ejector Header, Straight/Right Angle

#### SPECIFICATIONS


Current Rating : 3AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 1000V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: PBT  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u\* Ni

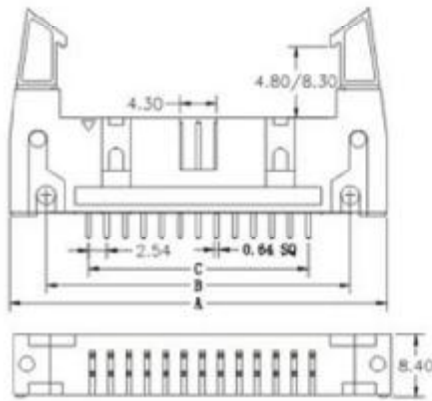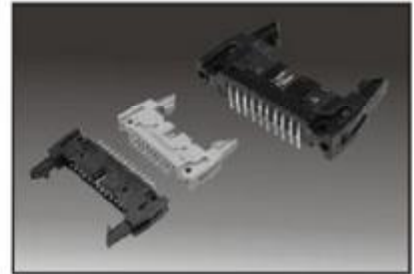


No. of Contacts	A	B	C
10	32.00	21.84	10.16
14	37.08	26.92	15.24
16	39.63	29.46	17.78
20	44.70	34.54	22.86
26	52.32	42.16	30.48
30	57.40	47.24	35.66
34	62.48	52.32	40.64
40	70.10	59.94	48.28
50	82.80	72.64	60.96
60	95.50	85.34	73.66
64	100.58	90.42	78.74

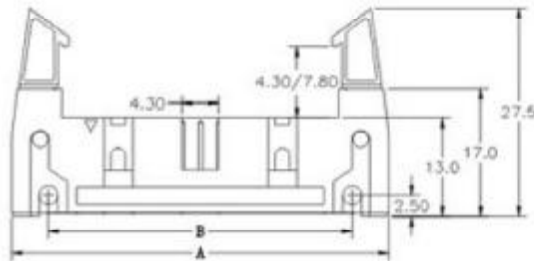

SHORT LATCH



LONG LATCH

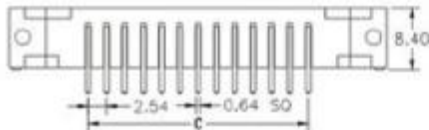

PCB LAYOUT

#### Ordering Information

3210	—	<u>XX</u>	<u>S</u>	<u>G0</u>	<u>B</u>	<u>L</u>	01
No. of Contacts		Connector Type	Contact Plating	Color Type	Latch Type		
10~64		S=Straight R=Right Angle	SN : Tin G0 : Gold Flash G2 : 5u* Gold G3 : 10u* Gold G4 : 15u* Gold G5 : 30u* Gold S0 : Gold Flash/Tin Standard: G0	B=Black G=Grey	L=Long Latch S=Short Latch N=Without Latch		

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢