




深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.



2.00mm BOX Header, Straight

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Brass
 Contact plating : Au or Sn over 50uⁿ Ni

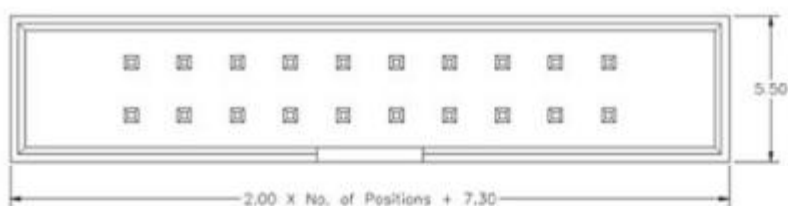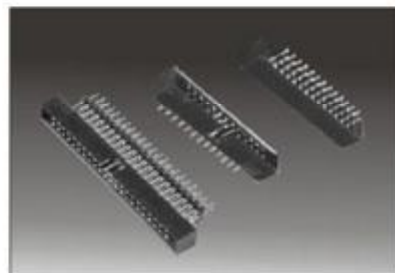

Type 1

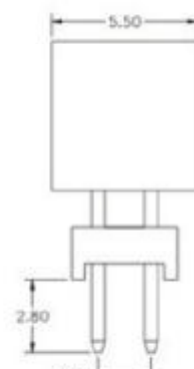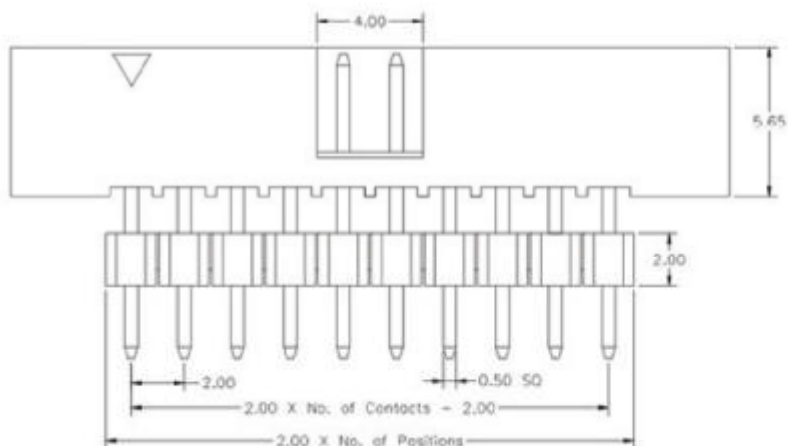

Type 2

Ordering Information

3111	—	XX	S	G0	B	K00	01
		No. of Contacts	Contact Plating		Color Type		
		08~68	SN : Tin G0 : Gold Flash G2 : 5u ⁿ Gold G3 : 10u ⁿ Gold G4 : 15u ⁿ Gold G5 : 30u ⁿ Gold S0 : Gold Flash/Tin Standard: G0		B=Black U=Blue W=White G=Grey		

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢