
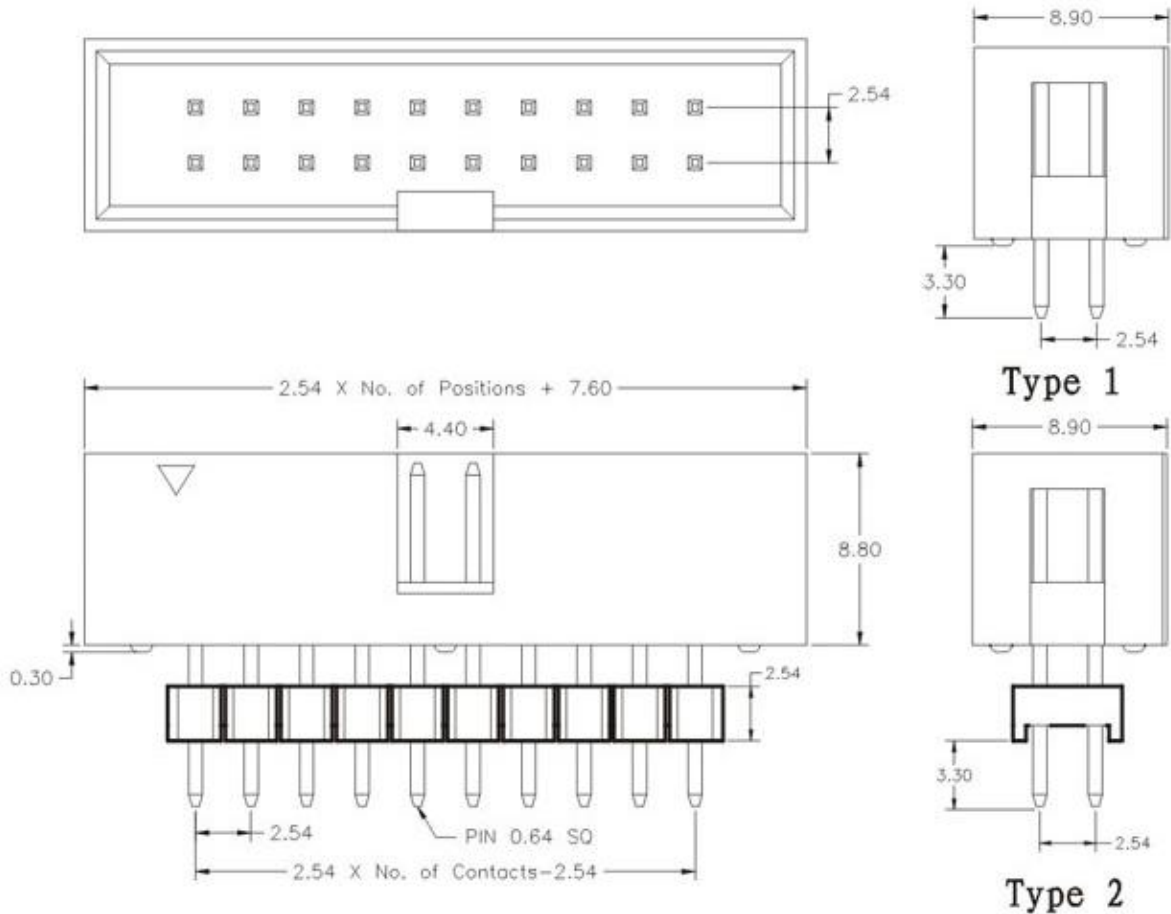


2.54mm BOX Header, Straight

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

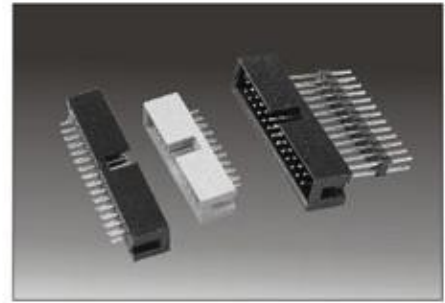

Ordering Information

3110	—	XX	S	G0	B	K00	01
		No. of Contacts	Contact Plating	Color Type			
		06~64	SN : Tin	B=Black			
			G0 : Gold Flash	U=Blue			
			G2 : 5u" Gold	R=Red			
			G3 : 10u" Gold	W=White			
			G4 : 15u" Gold	Y=Yellow			
			G5 : 30u" Gold	G=Grey			
			S0 : Gold Flash/Tin				
			Standard: G0				

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢