


深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.54mm BOX Header, S. M. T

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

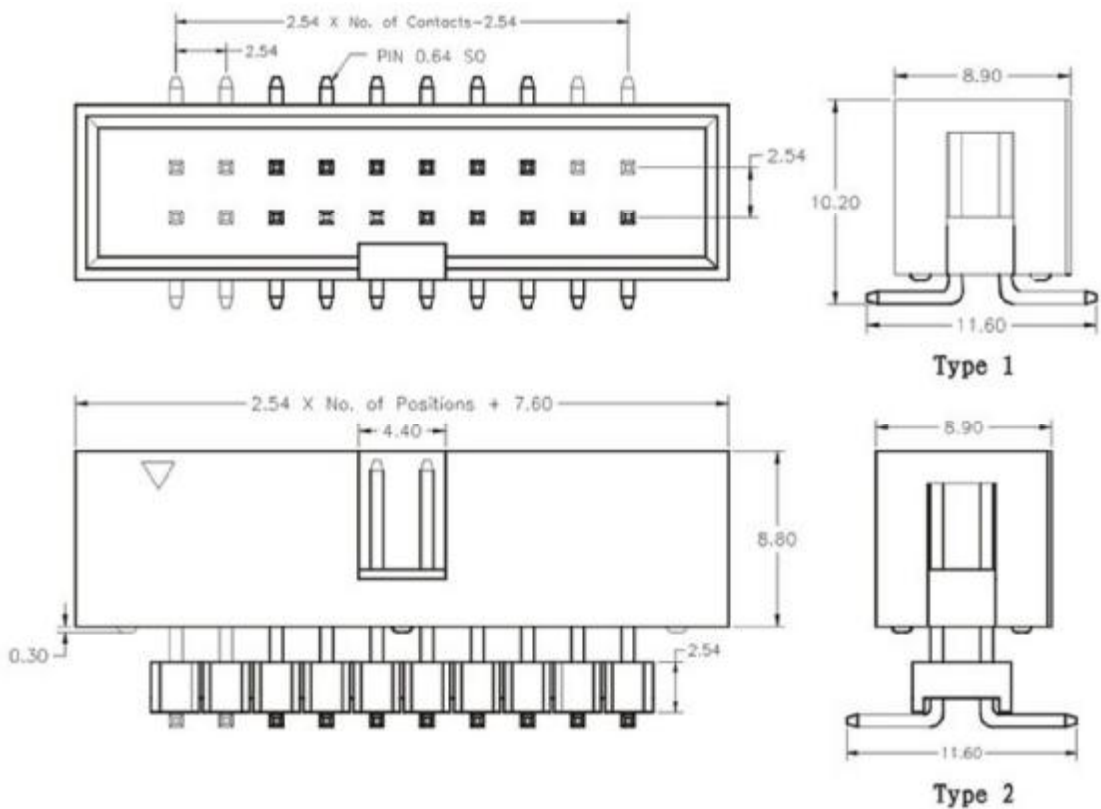

Ordering Information

3110	—	XX	M	G0	B	K00	01
		No. of Contacts	Contact Plating	Color Type			
		06~64	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	B=Black U=Blue R=Red W=White Y=Yellow G=Grey			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢