


深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.54mm Mini Jumper

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u" Ni

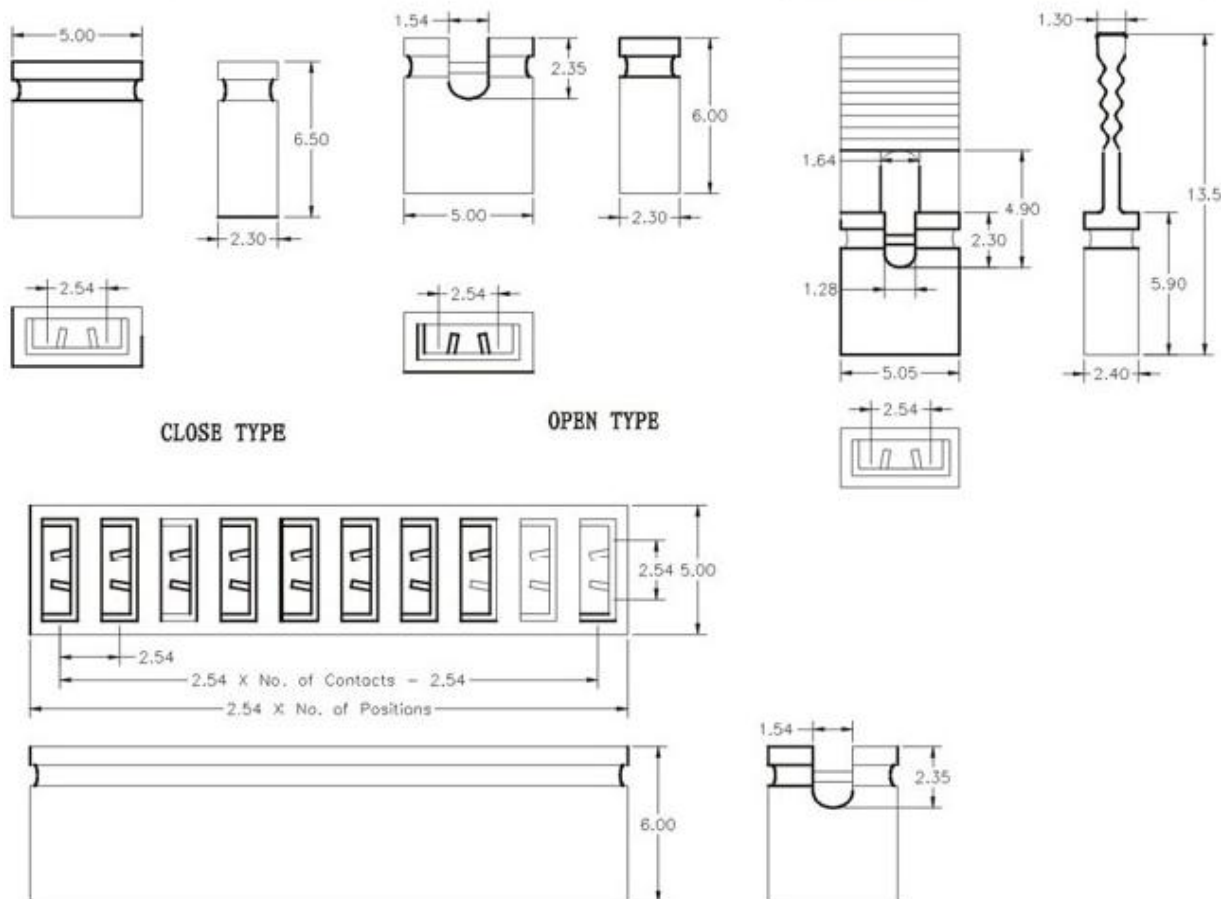

Ordering Information

37 10	60	01	C	G0	B
Connector Type	Plastics Height	No. of Positions	Function	Contact Plating	Color Type
<ul style="list-style-type: none"> ↳=Mini Jumper ↳=Parallel Type ↳=Handle Type 	<ul style="list-style-type: none"> 45=4.5mm 60=6.0mm 65=6.5mm 80=8.0mm 13=13.5mm 	<ul style="list-style-type: none"> 01=Single Type 04=(1*4) Parallel Type 10=(1*10) Parallel Type 20=(1*20) Parallel Type 	<ul style="list-style-type: none"> C=Close Type O=Open Type 	<ul style="list-style-type: none"> SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0 	<ul style="list-style-type: none"> B=Black U=Blue R=Red W=White Y=Yellow G=Grey

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szylconn.com

E-mail: sales@szylconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢