
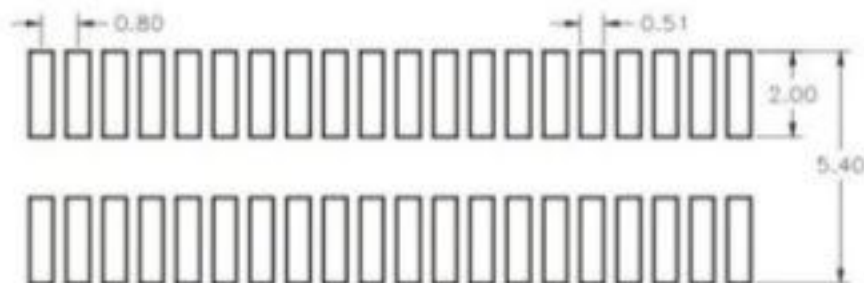

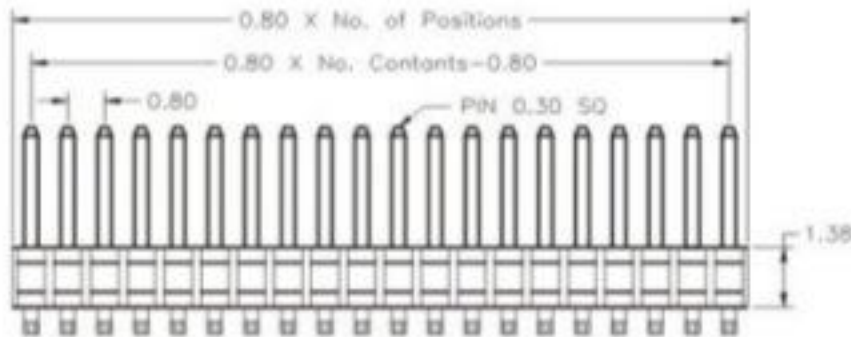


0.8*1.2mm Pin Header, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 0.75AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u² Ni

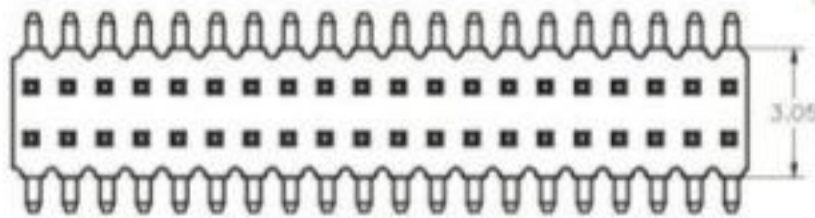

PCB LAYOUT

Ordering Information

1	6	14	—	1	2	XX	G0	M	XXX	01
				No. of Pins Per Row		Contact Plating		Pin Length		
				01~50		SN : Tin G0 : Gold Flash G2 : 5u ² Gold G3 : 10u ² Gold G4 : 15u ² Gold G5 : 30u ² Gold S0 : Gold Flash/Tin Standard: G0		$XXX = B + D + 1.38 + (W - 1.2) / 2$		