





# 深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

## 2.54mm Female Header, Round Pin, Straight

### SPECIFICATIONS

Current Rating : 3AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20m Ω Max.  
 Insulation Resistance: 1000M Ω Min.  
 Withstanding Voltage : AC 1000V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: PBT  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u" Ni

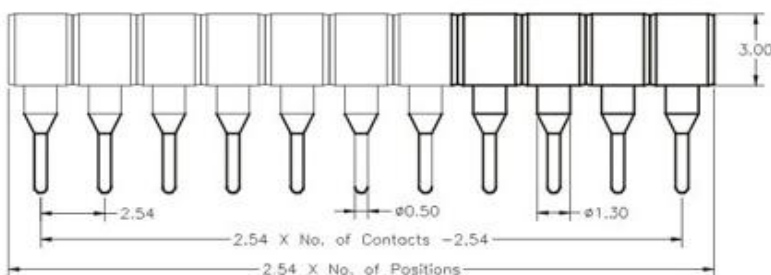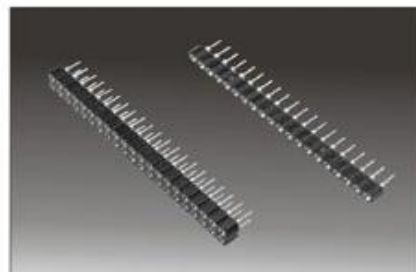

PCB LAYOUT

### Ordering Information

3520	—	30	2	XX	S	S0	01
		Plastics Height 30=3.0mm	No. of Rows 1=Single Row 2=Dual Row	No. of Contacts 02~40		Contact Plating SN : Tin G0 : Gold Flash S0 : Gold Flash/Tin S3 : 10u" Gold/Tin S4 : 15u" Gold/Tin S5 : 30u" Gold/Tin Standard: S0	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢